



# Tandem Dual Axle Tire Cover Installation Instructions

Place the tire cover over the dual tires with the long side facing out.

Thread the heavy-duty strap on the back side of the cover through the quick release buckle on the opposite side and pull loose end of the strap until snug. Refer to illustration below for the proper way to thread a quick release buckle.

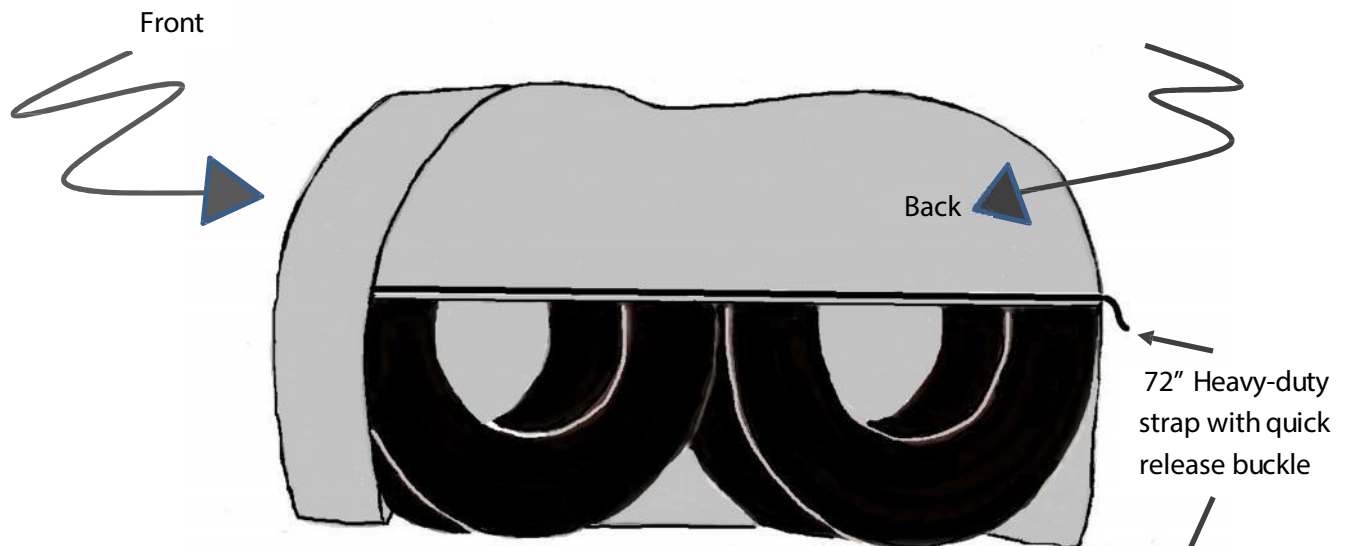

Follow the threading sequence at right to secure the tire cover. Leave approximately 12" of webbing for adjustability and trim off any excess (if desired) using a pair of scissors. Lightly singe the cut edge of the webbing using a cigarette lighter to fuse the yarns and prevent the webbing from unraveling. **DO NOT IGNITE THE WEBBING. BE SURE FLAME IS EXTINGUISHED.**

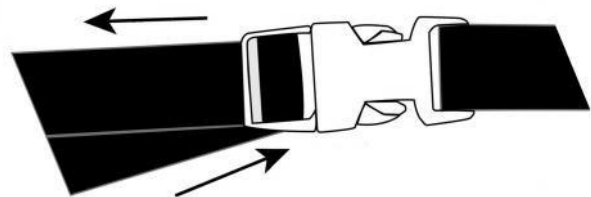

**DO NOT ATTEMPT TO MOVE THE VEHICLE WITH THE TIRE COVER INSTALLED.**

MADE IN THE USA

© 2019 Carver by Covercraft®  
212 N. Lyles Ave., Landrum, SC 29356  
(864) 457-5820 [www.carvercovers.com](http://www.carvercovers.com)

