



Windshield Instructions and Owners Manual

Fishmaster, Inc.
www.Fishmaster.com
Support@Fishmaster.com

Phone: 877-777-8693
Fax: 877-437-6210

THANK YOU FOR YOUR BUSINESS. Our entire purpose as a company is to offer great products at affordable prices that our customers love.

Please take a few minutes to read the installation instructions and become familiar with the WINDSHIELD and installation before beginning to ensure a high quality, trouble free installation and use. If you have any questions during your installation give us a call at 877-777-8693 or e-mail Support@Fishmaster.com

IMPORTANT NOTES ON INSTALLING AND USING YOUR WINDSHIELD

- Read entire manual before installation
- Make sure your field of view is not obscured after mounting your windshield to the T-Top.
- Be sure your windshield is strapped securely and tightly to the T-Top.
- The clear vinyl can scratch so be careful handling and storing the windshield.
- The windshield should be rolled up or removed for trailering.
- Wash only with water, your hands, a soft sponge or a towel.



Fishmaster, Inc Warranty

Fishmaster warrants this product against manufactures defects for a period of five (5) years. Anodized surfaces are specifically excluded, as their care and use cannot be controlled by the manufacturer. Any modifications or improper use, not approved in writing by Fishmaster shall void this warranty. Fishmaster is not responsible for personal injury or damage to the boat caused by the use of this product. Fishmaster's obligation under this warranty shall not include any transportation charges or costs of installation or any liability for direct, indirect or consequential damages resulting from delay or improper installation. If you need to make a warranty claim contact Fishmaster at 877-777-Tower to receive a return authorization number which is required for all claims. Defects must be reported within 30 days of discovery.

WINDSHIELD



WINDSHIELD INSTALLATION: There are eleven straps which attach the windshield to the t-top. Four straps go onto the front left upright, four straps go onto right upright and three straps go onto the cross bar as illustrated below.

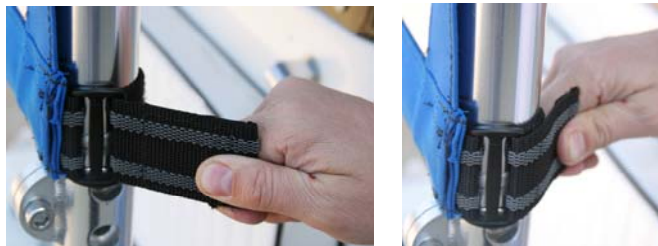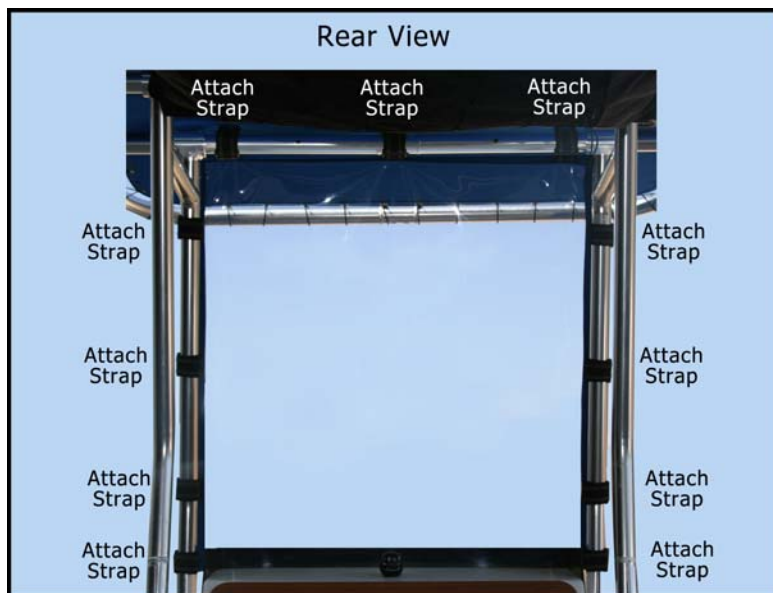

Wrap strap around post and insert through buckle - pull tight and attach.

CLEANING INSTRUCTIONS: Don't clean the clear plastic of your windshield when it is dry – you can scratch it. The best way to clean the clear plastic is to hose it off with water and rub it with your bare hands or a soft sponge. You may use a liquid soap.