



Rod Grommets Instructions and Owners Manual

Fishmaster, Inc.
www.Fishmaster.com
Support@Fishmaster.com

Phone: 877-777-8693
Fax: 877- 437-6210

THANK YOU FOR YOUR BUSINESS. IF YOU ARE NOT COMPLETELY SATISFIED IN ANY WAY WITH YOUR ROD GROMMETS, PLEASE CONTACT US. Our entire purpose as a company is to offer great products at affordable prices that our customers love.

Please take a few minutes to read the installation instructions and become familiar with the Rod Grommets and installation before beginning to ensure a high quality, trouble free installation and use. If you have any questions during your installation give us a call at 877-777-8693 or e-mail Support@Fishmaster.com


IMPORTANT NOTES ON INSTALLING AND USING YOUR NEW ROD GROMMETS

- Read entire manual before installation

Fishmaster, Inc Warranty

Fishmaster warrants this product against manufactures defects for a period of five (5) years. Any modifications or improper use, not approved in writing by Fishmaster shall void this warranty. Fishmaster is not responsible for personal injury or damage to the boat caused by the use of this product. Fishmaster's obligation under this warranty shall not include any transportation charges or costs of installation or any liability for direct, indirect or consequential damages resulting from delay or improper installation. Going fishing is a lot more fun that writing or ready disclaimers. If you need to make a warranty claim contact Fishmaster at 877-777-Tower to receive a return authorization number which is required for all claims. Defects must be reported within 30 days of discovery.

Fishmaster ROD GROMMETS Parts List

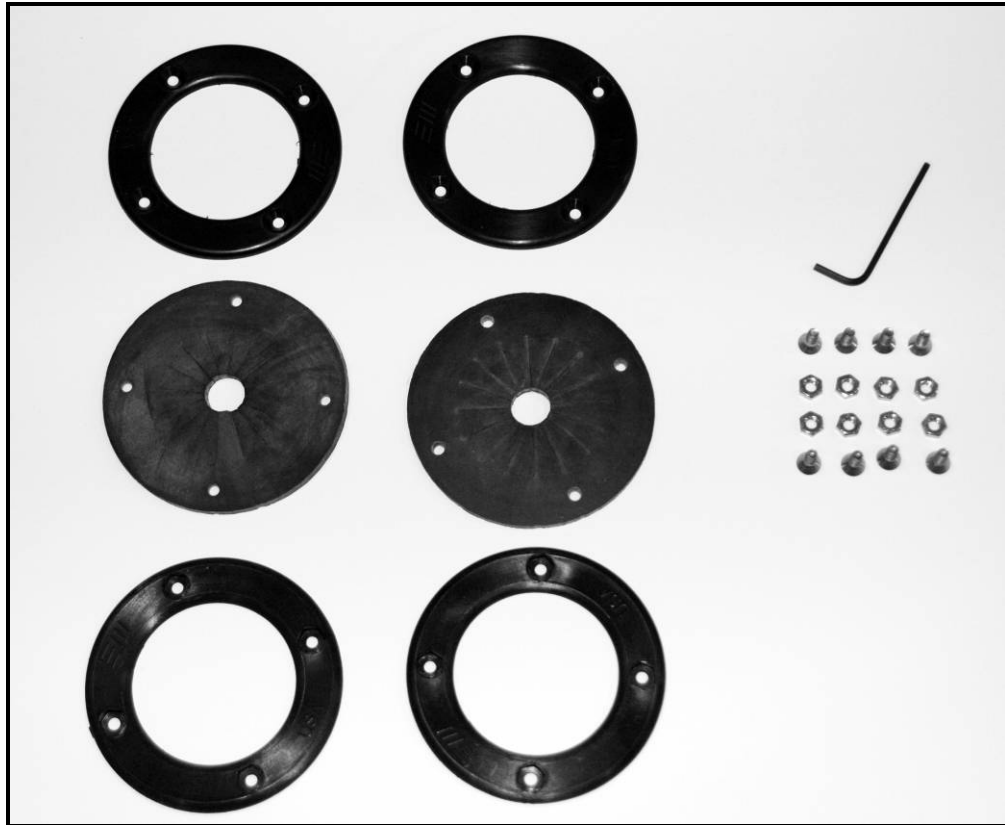


2 Rod Grommets Come in a Set



Item	Description
2 Rubber Grommets	Attaches to Canvas on T-Top to allow rod to go through top for storage
4 Plastic Sealer Rings	Used to seal the rubber grommet on the top and bottom of the canvas
8 Hex Bolts	Used to attach the top ring to the bottom ring
8 Nuts	Used to attach the top ring to the bottom ring

INSTALLATION


1. Locate exact area on canvas top where you would like to mount the Rod Grommet to allow the rod tip to pass through the top.
2. Place top ring on canvas where you want to mount the Rod Grommet. With a marker, trace the inner ring. Also, mark the 4 holes where the bolts will pass through.

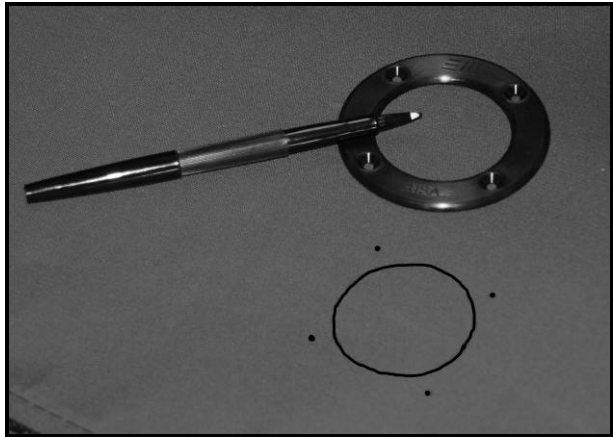


3. Using a drill or an item with a sharp point puncture holes in the canvas where the bolts will be passing through the canvas.
4. Using a sharp razor knife cut out the circle in the canvas that you have marked

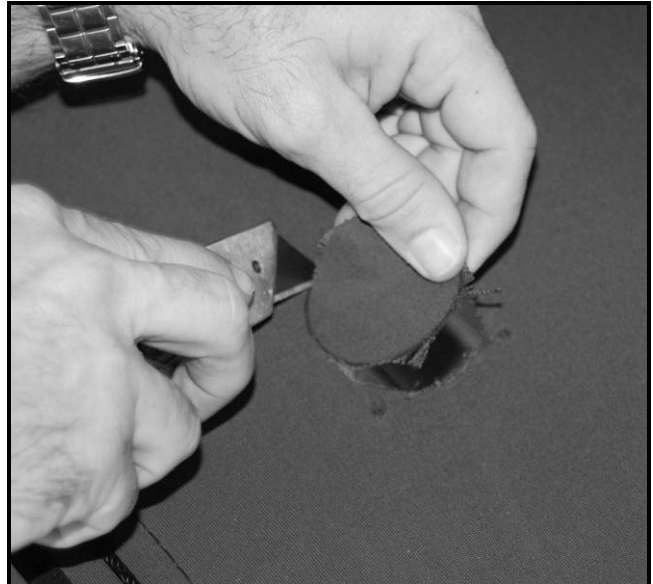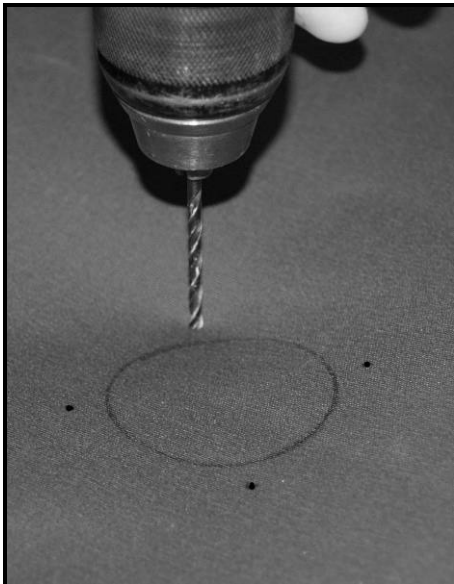


5. Place the top ring on the top of the canvas and insert the 4 bolts through the top ring and the canvas. Note: The top ring is beveled out so that the screw head is flush with the plastic ring. Use the supplied Allen wrench and screw the bolts through the canvas.

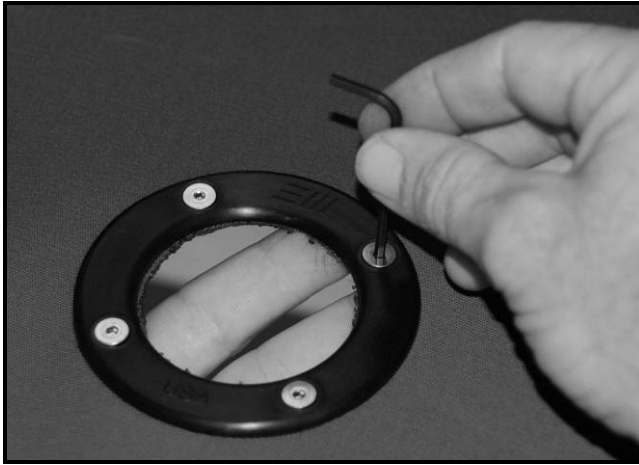

6. On the bottom side of the canvas place the rubber grommet onto the bolts and then the bottom plastic ring. Place the nuts onto the bolts and tighten them into the recessed hexagon pattern on the ring.

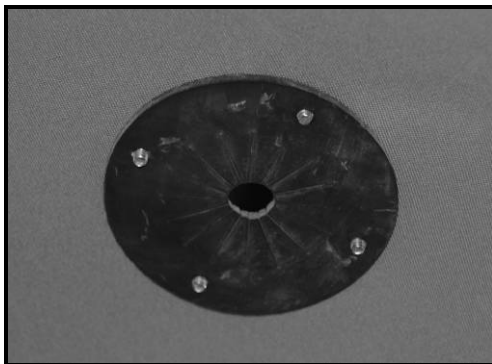

Rubber Grommet

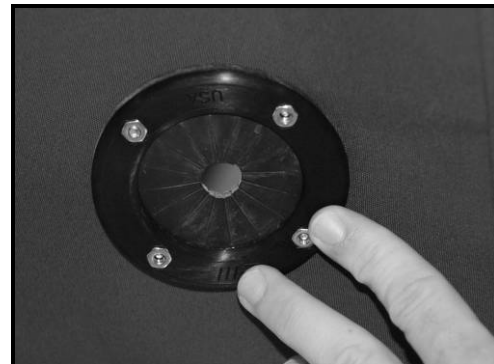

**Rubber Grommet with
Plastic Ring and Bolts**