



T-Top Cover Installation Instructions



This cover is recommended for storage only.
Do not travel with cover installed.

Please note that the tag represents the inside of the cover when installing.

Step 1 – Identify the inside of the cover, unzip the zipper and loosen the Velcro.

Step 2 – Lift the roll onto the top of the Hard Top/T-top. With the cover stationary on top of the Hard Top/T-top, proceed to the aft end of the boat.


Step 3 – Install the 2 support poles included in the package; space equally between the rod holders. The support poles are designed to keep the weight of the cover off of the antennas and/or outriggers.

Step 4 – From the aft end, unroll the cover taking care to remain between the VHF antennas (if applicable). Continue to unroll the cover towards the bow.

Step 5 – Working from port to starboard side, spread the cover over the support poles. Close the Velcro and zip the cover.

Step 6 - Once installed, tighten the strap. The strap is located at the front of the cover on port side and starboard side. Remove the rubber band, unroll the straps and pull to the back of the cover. One strap will have a quick release buckle. Thread the loose end of the strap into the buckle and tighten. This buckle is just like the buckle on a life jacket. Picture illustrates proper installation.

The zipper is designed to allow access to the console while the cover is installed.

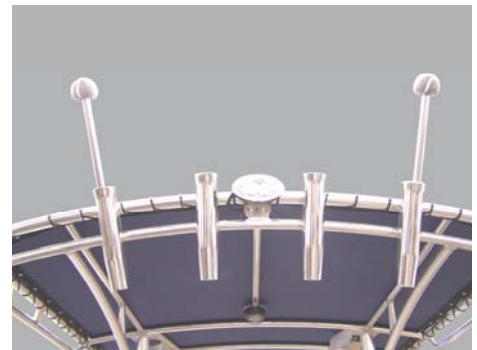

Support Poles are designed to keep the weight of the T-Top Cover off VHF antennas and/or outriggers.

MADE IN THE USA by
Carver Industries, Inc.

P.O. Box 399

Landrum, South Carolina 29356

