



Westland

Boat Cover Installation Instructions

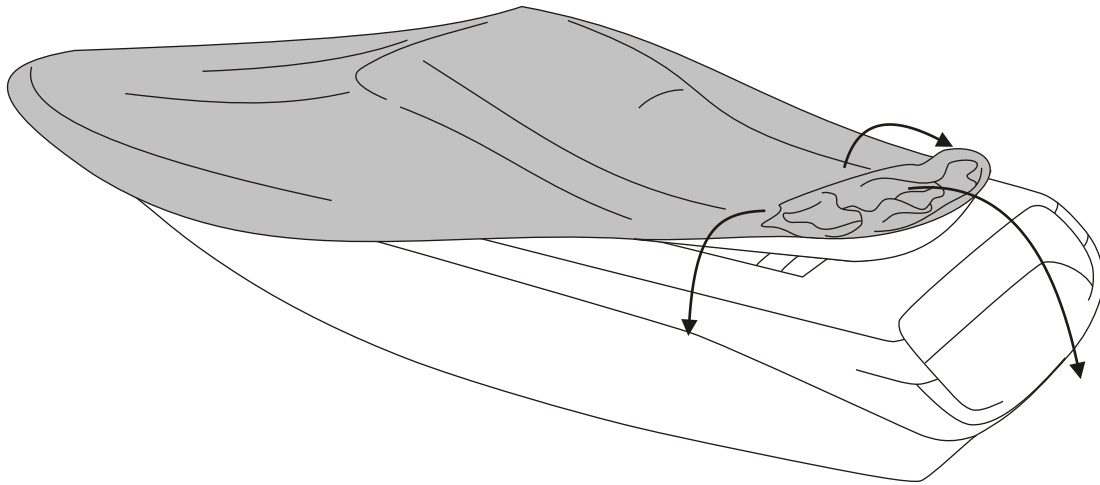

1 Start by placing the bow end of the cover over the front end of the boat. Unroll the cover working towards the rear of the boat while unfolding out to the sides.

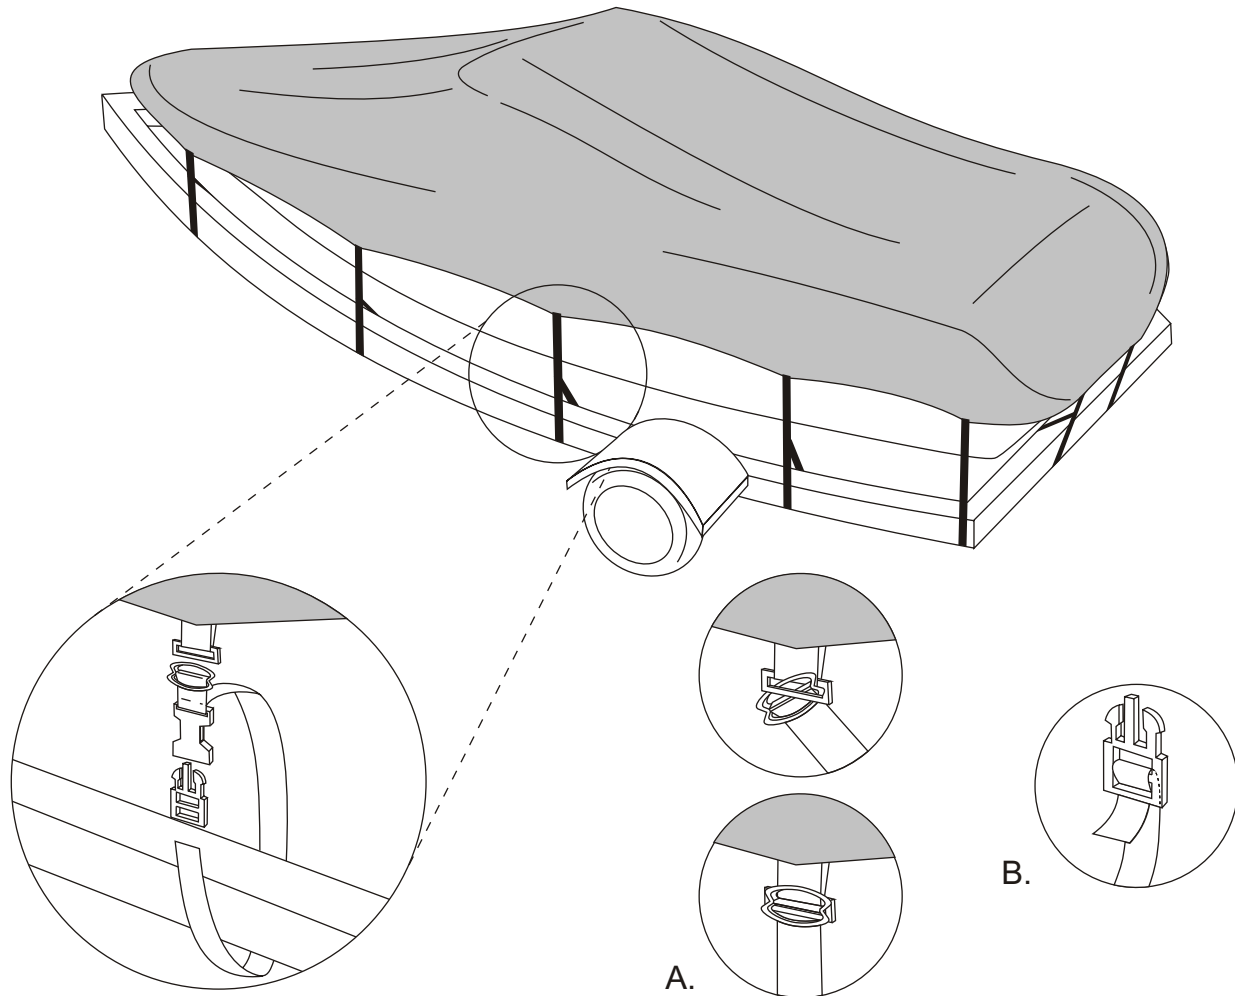

2 Attach strap to cover by sliding the buckle of strap through the loop sewn on cover as shown in figure A (make sure to slide it through from the back so the buckle does not rub against the boat). Loop the strap down around the trailer frame and back up to the nylon side-release buckle. Thread strap through the top of the buckle and then through the bottom as shown in figure B. Cinch the strap down tight enough so when straps are installed on both sides of the boat, the cover is held taut. **There are twelve straps included in each box. However, the loop placement doesn't always allow for straps to be used in some areas of your trailer (like wheel wells for example). It is acceptable to leave certain loops without a strap to attach to the trailer. If you feel additional straps are needed please order through our customer service department at 1-800-874-6824.**